


375/267
3/10/00

1/5

09801850704

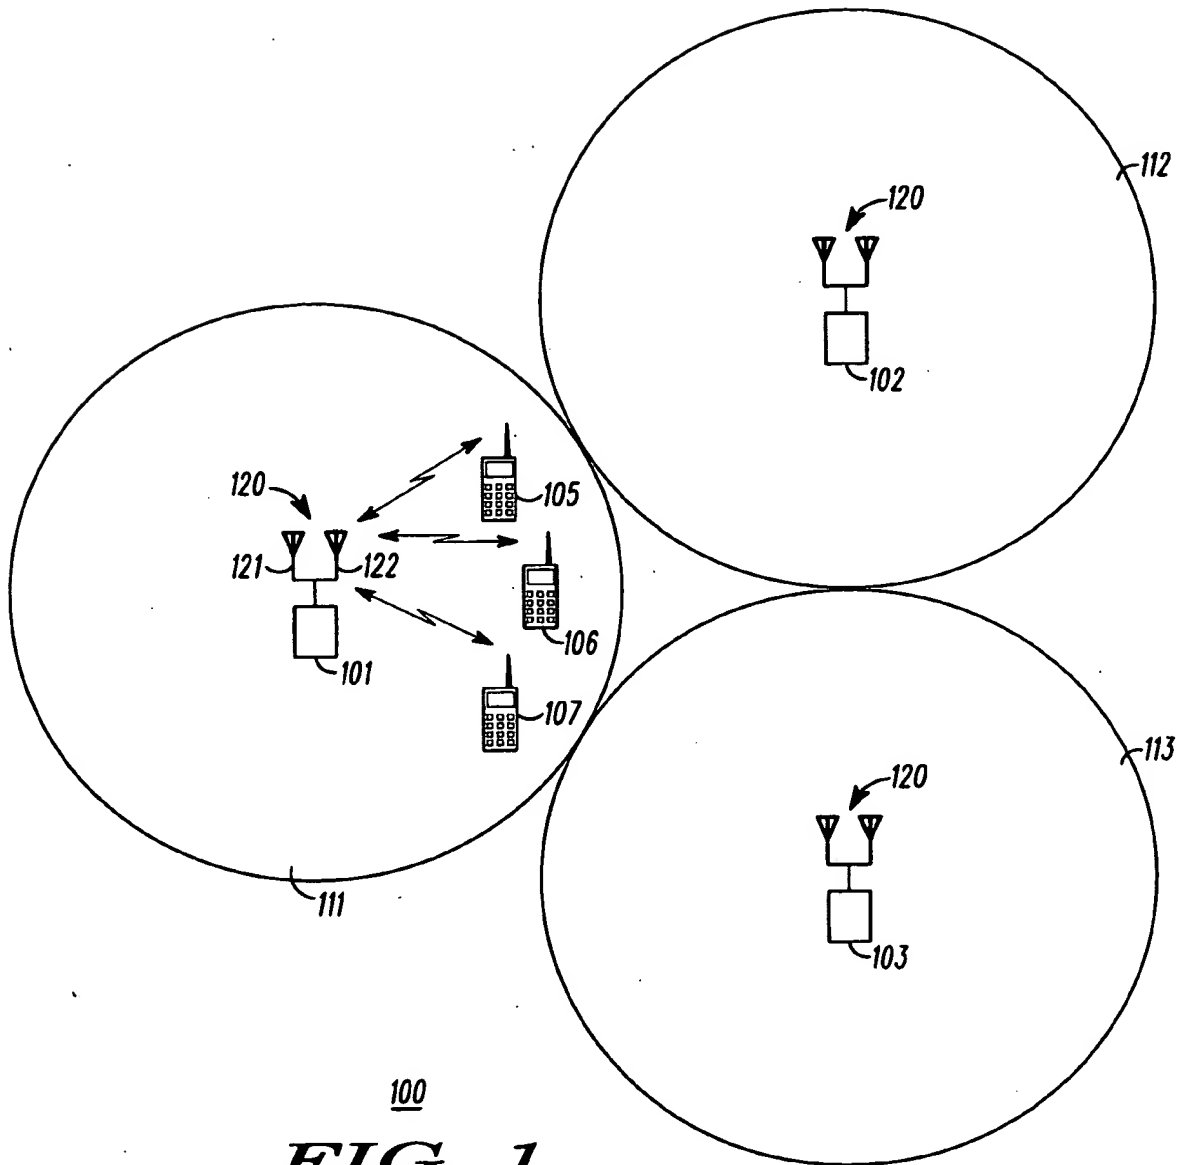

100
FIG. 1

101-103

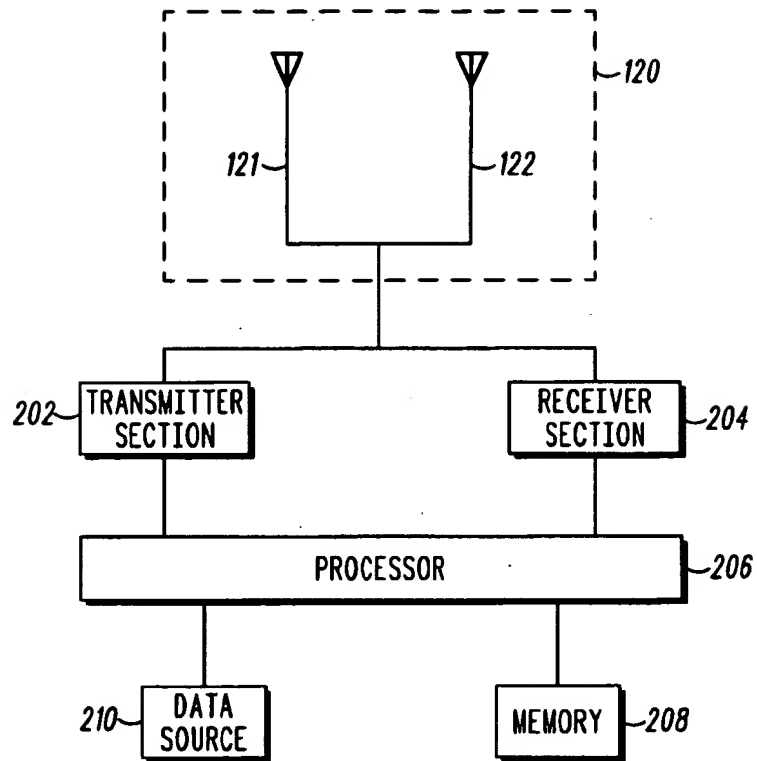


FIG. 2

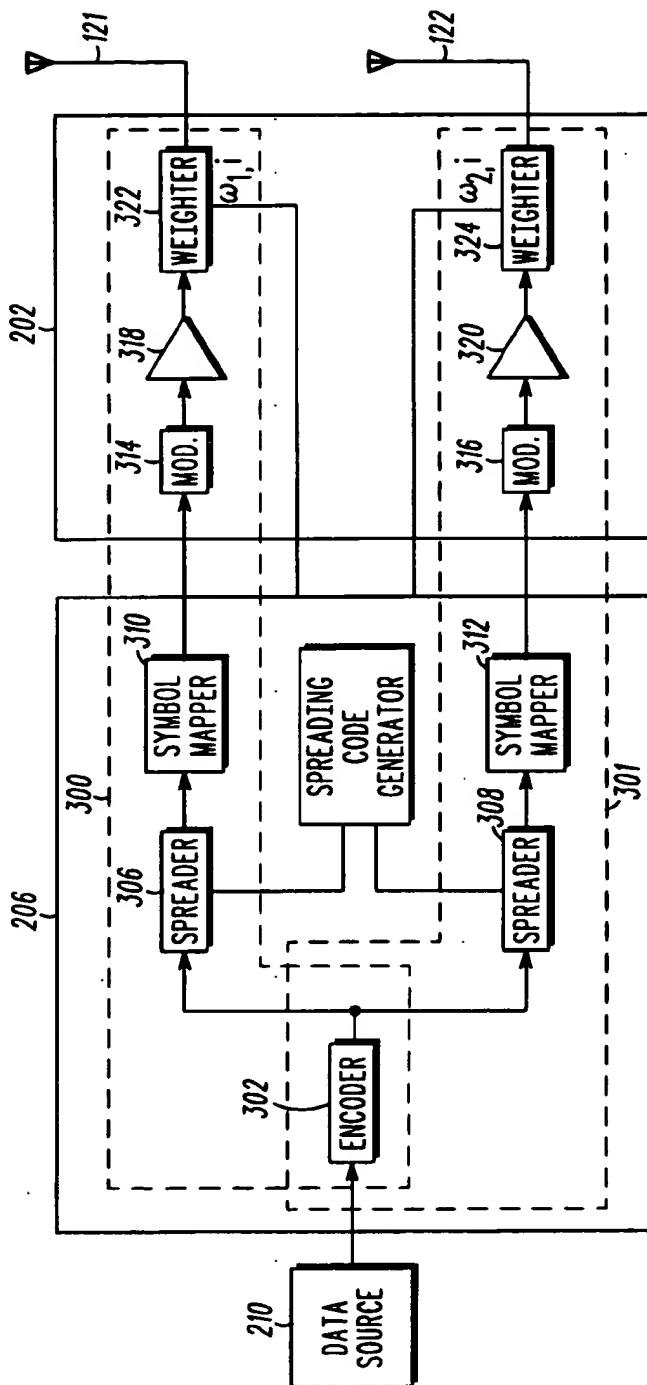


FIG. 3

4/5

400

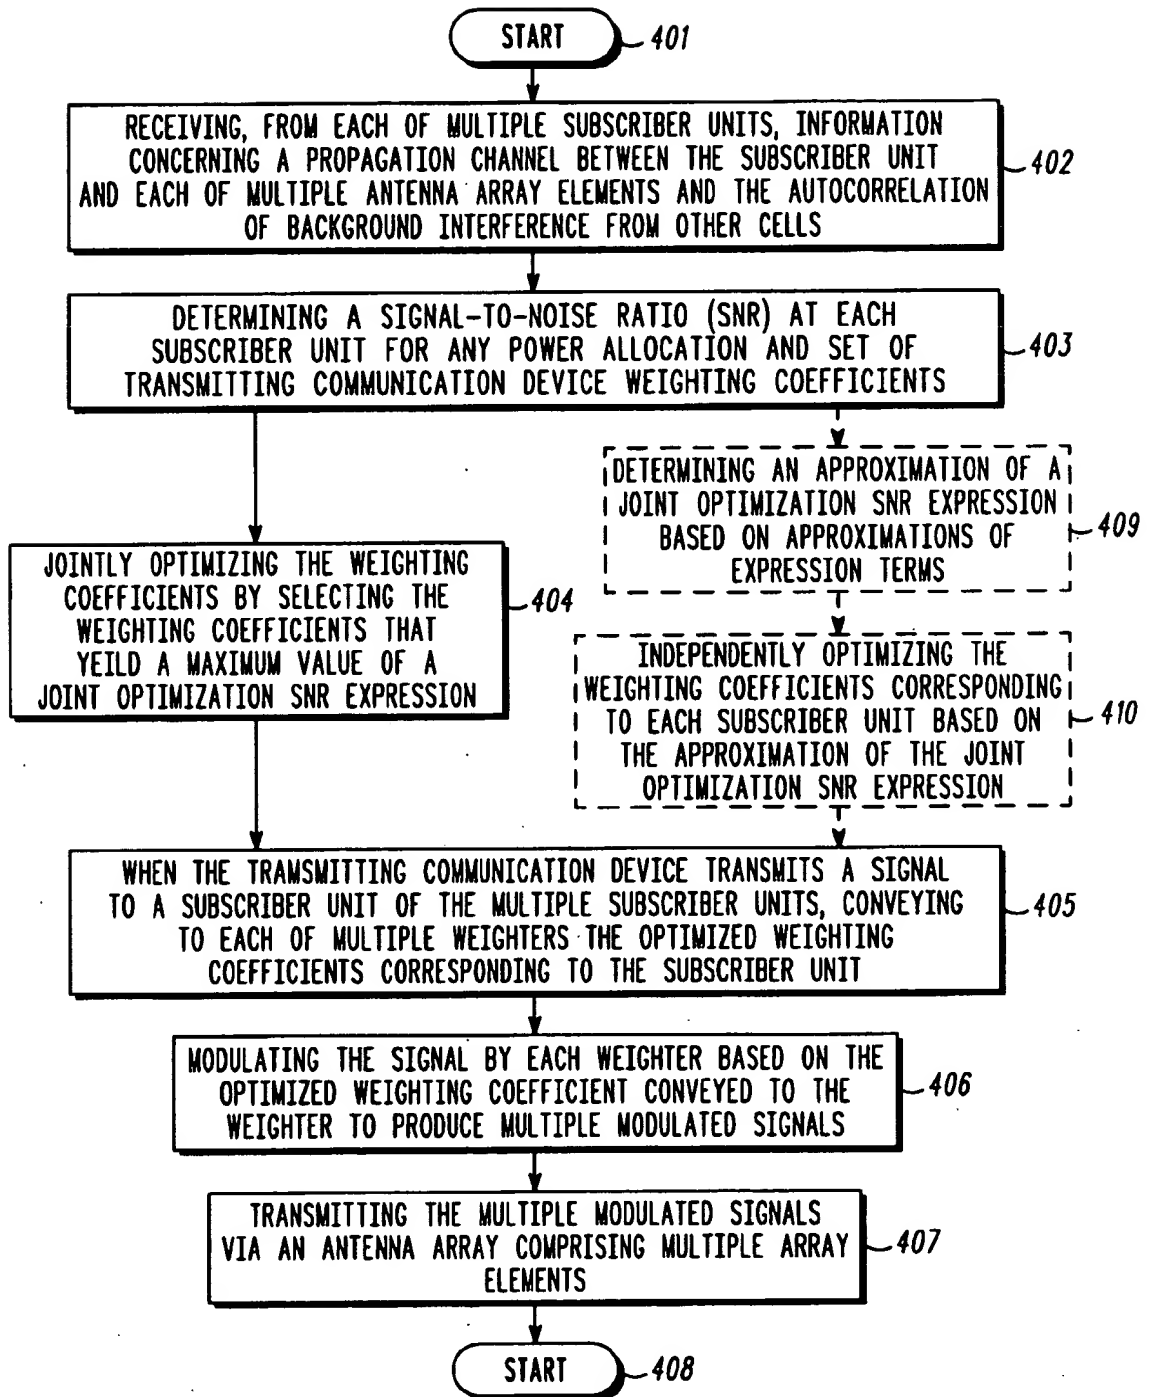


FIG. 4

5/5

E_c/I_{or}	$(E_s/N_t)_{TxAA} - (E_s/N_t)_{STD} \text{ (dB)}$			
	$I_{or}/I_{oc}=0 \text{ dB}$	$I_{or}/I_{oc}=5 \text{ dB}$	$I_{or}/I_{oc}=10 \text{ dB}$	$I_{or}/I_{oc}=\infty \text{ dB}$
0.05	2.00	1.66	1.28	0.92
0.1	1.94	1.52	1.07	0.61
0.2	1.82	1.25	0.62	-0.03
0.5	1.44	0.37	-0.93	-2.45
0.9	0.91	-1.01	-3.85	-9.88

A COMPARISON OF THE PERFORMANCE OF TxAA ANTENNA ARRAY WEIGHTING AND STD AS A FUNCTION OF I_{or}/I_{oc} AND E_c/I_{or} .

FIG. 5

E_c/I_{or}	$(E_s/N_t)_{OPTIMAL} - (E_s/N_t)_{TxAA} \text{ (dB)}$			
	$I_{or}/I_{oc}=0 \text{ dB}$	$I_{or}/I_{oc}=5 \text{ dB}$	$I_{or}/I_{oc}=10 \text{ dB}$	$I_{or}/I_{oc}=\infty \text{ dB}$
0.05	0.02	0.09	0.21	0.36
0.1	0.03	0.13	0.29	0.51
0.2	0.05	0.22	0.51	0.90
0.5	0.14	0.65	1.55	2.84
0.9	0.36	1.62	4.03	9.89

A COMPARISON OF THE PERFORMANCE OF OPTIMIZED TRANSMITTER ANTENNA ARRAY WEIGHTING OF THE PRESENT INVENTION (OPTIMAL) WITH THE TxAA TRANSMITTER ANTENNA ARRAY WEIGHTING OF THE PRIOR ART AS A FUNCTION OF I_{or}/I_{oc} AND E_c/I_{or} .

FIG. 6

FO2050-26810860

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☒ OTHER: Black spots

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.